



4.0 AMP GLASS PASSIVATED BRIDGE RECTIFIER - 50V-1000V

RS-4L PACKAGE

**RS401L
THRU
RS407L**

FEATURES

- * Ideal for printed circuit board
- * Surge overload rating: 150 amperes peak
- * Mounting position: Any
- * Weight: 5.15 grams
- * Molded structure
- * RoHS product for packing code suffix "G"
- * Halogen free product for packing code suffix "H"
- * **Moisture Sensitivity Level 1**



MECHANICAL DATA


- * UL listed the recognized component directory, file #E195711
- * Epoxy: Device has UL flammability classification 94V-O

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

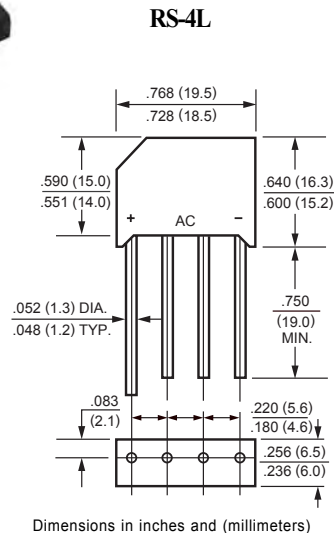

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	RS401L	RS402L	RS403L	RS404L	RS405L	RS406L	RS407L	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Current TA = 50°C	IO	4.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	150							Amps
Typical Thermal Resistance from junction to case (Note 2)	RθJC	10							°C/W
Typical Thermal Resistance from junction to ambient	RθJA	28							°C/W
Operating Temperature Range	TJ	-55 to + 150							°C
Storage Temperature Range	TSTG	-55 to + 150							°C
Typical Junction Capacitance (Note 1)	CJ	40							pF

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	RS401L	RS402L	RS403L	RS404L	RS405L	RS406L	RS407L	UNITS
Maximum Forward Voltage Drop per Bridgeat Element at 4.0A DC	VF	1.1							Volts
Maximum Reverse Current at Rated	IR	5							uAmps
Dc Blocking Voltage per element		1							mAmps

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts
2. Device mounted on 50mm x 50mm x 1.6mm Cu Plate Heatsink.
3. Power dissipation: 4.4Wats



RATING AND CHARACTERISTIC CURVES (RS401L THRU RS407L)

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

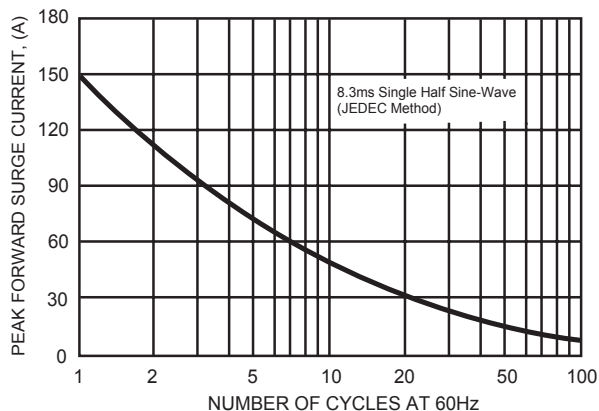


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

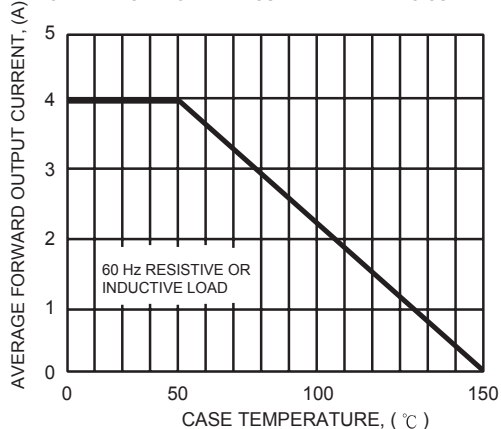


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


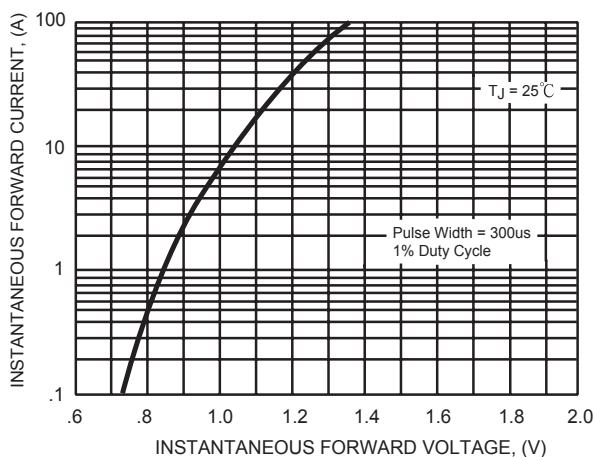


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS





WILLAS

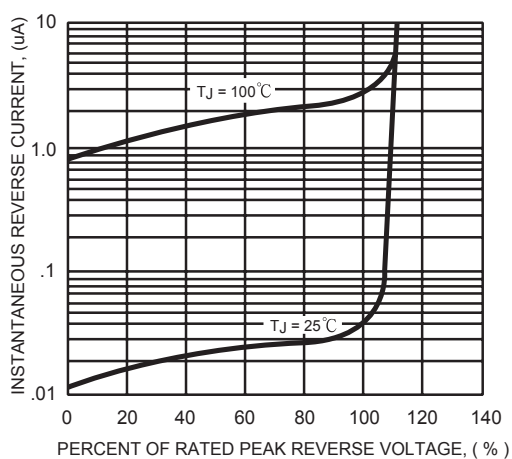

4.0 AMP GLASS PASSIVATED BRIDGE RECTIFIER - 50V-1000V

RS-4L PACKAGE

**RS401L
THRU
RS407L**

Ordering Information:

Device PN	Packing
Part Number-G ⁽¹⁾ -WS	Bulk: 400pcs/Box

Note: (1) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.